



BLUE DYNAMIC

Key benefits

Engineered to the highest German standards



Patented PowerFrame® grid for reliable starting power, fast recharge and corrosion resistance




Meets all original criteria of the car manufacturer


- For all cars with standard equipment
- Up to 25% higher starting power than Black

For more information visit www.varta-automotive.com

| ORDER INFORMATION | | |
|--------------------------|-------------------|--|
| European Type No. (ETN): | 560 408 054 | |
| Article Number: | 560 408 054 313 2 | |
| Short Code: | D24 | |
| Barcode: | 4016987119501 | |
| UK Code: | 027 | |
| Packaging Unit: | 1 | |
| Quantity per Pallet: | 63 | |

| TECHNICAL INFORMATION | | | | | |
|-----------------------------------|-----|---------------------|--------|--|--|
| Voltage [V]: | 12 | Base Hold-down: | B13 | | |
| Battery Capacity [Ah]: | 60 | Layout: | 0 | | |
| Cold Cranking Amps (CCA), EN [A]: | 540 | Terminal Types: | 1 | | |
| Length [mm]: | 242 | Case Size: | H5/LN2 | | |
| Width [mm]: | 175 | Weight filled (kg): | 15,00 | | |
| Height [mm]: | 190 | | | | |

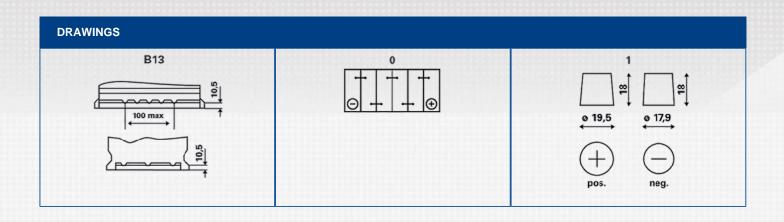

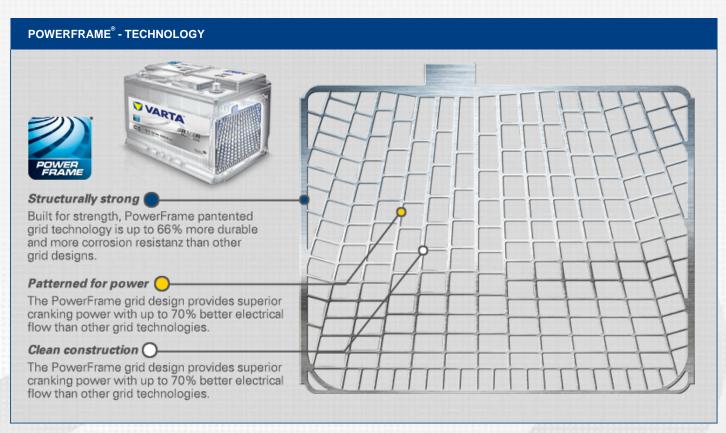







| | SILVER Dynamic | BLUE Dynamic | BLACK Dynamic |
|---------------------------------|-------------------------|--------------------------|--------------------------|
| Number of battery types | 11 types | 25 types | 13 types |
| Primary function | Engine start | Engine start | Engine start |
| Cold cranking power | CCA 122%* | CCA 110%* | CCA 100%* |
| Battery technology | Flooded/SLI* | Flooded/SLI | Flooded/SLI |
| Positive grid/ Negative grid | PowerFrame® / Expanded | PowerFrame® / Expanded | PowerFrame® / Expanded |
| OE quality | Exceeds OE requirements | Meets original equipment | Meets original equipment |