



# SILVER DYNAMIC

#### Key benefits

Engineered to the highest German standards



Patented PowerFrame® grid for reliable starting power, fast recharge and corrosion resistance



Meets all original criteria of the car manufacturer

- The premium battery for vehicles with non-start-stop technology
- Up to 15% higher starting power than Blue

For more information visit www.varta-automotive.com

| ORDER INFORMATION        |                   |  |  |
|--------------------------|-------------------|--|--|
| European Type No. (ETN): | 585 200 080       |  |  |
| Article Number:          | 585 200 080 316 2 |  |  |
| Short Code:              | F18               |  |  |
| Barcode:                 | 4016987119563     |  |  |
| UK Code:                 | 110               |  |  |
| Packaging Unit:          | 1                 |  |  |
| Quantity per Pallet:     | 36                |  |  |

| TECHNICAL INFORMATION             |     |                     |         |  |  |
|-----------------------------------|-----|---------------------|---------|--|--|
| Voltage [V]:                      | 12  | Base Hold-down:     | B13     |  |  |
| Battery Capacity [Ah]:            | 85  | Layout:             | 0       |  |  |
| Cold Cranking Amps (CCA), EN [A]: | 800 | Terminal Types:     | 1       |  |  |
| Length [mm]:                      | 315 | Case Size:          | T7/LBN4 |  |  |
| Width [mm]:                       | 175 | Weight filled (kg): | 19,02   |  |  |
| Height [mm]:                      | 175 |                     |         |  |  |

## DRAWINGS



# POWERFRAME<sup>®</sup> - TECHNOLOGY. TRUE STRENGTH™ INSIDE





## Structurally strong


Built for strength, PowerFrame pantented grid technology is up to 66% more durable and more corrosion resistanz than other grid designs.

### Patterned for power O

The PowerFrame grid design provides superior cranking power with up to 70% better electrical flow than other grid technologies.

### Clean construction

The PowerFrame grid design provides superior cranking power with up to 70% better electrical flow than other grid technologies.

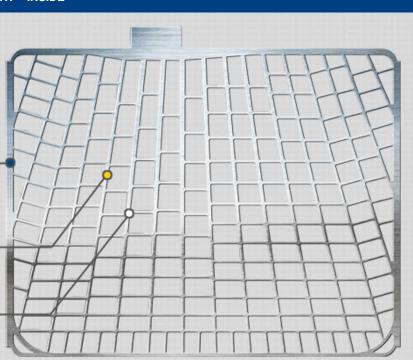



|                                 | SILVER Dynamic          | BLUE Dynamic             | BLACK Dynamic            |
|---------------------------------|-------------------------|--------------------------|--------------------------|
| Number of battery types         | 11 types                | 25 types                 | 13 types                 |
| Primary function                | Engine start            | Engine start             | Engine start             |
| Cold cranking power             | CCA 122%*               | CCA 110%*                | CCA 100%*                |
| Battery technology              | Flooded/SLI*            | Flooded/SLI              | Flooded/SLI              |
| Positive grid/<br>Negative grid | PowerFrame® / Expanded  | PowerFrame® / Expanded   | PowerFrame® / Expanded   |
| OE quality                      | Exceeds OE requirements | Meets original equipment | Meets original equipment |

\*Compared to conventional batteries