

Rolls



FLOODED DEEP CYCLE BATTERY

6 FS GC-DIN



Series	FS	Warranty	1 Year
Volts	6	BCI	GC-DIN
Cells	3	Plates/Cell	17
Terminal Type	Auto Post		
Size & Thread	5/16"-18 x 1-1/2"		

Charge

Charge Voltage Range	2.45-2.5 V/cell @ 25°C (77°F)
Float Voltage Range	2.25 V/cell @ 25°C (77°F)
Recommended Charge Current Capacity (String)	30 A
Maximum Charge Current (String)	50 A
Self-Discharge Rate	5%-10% per month at 25°C (77°F)

Capacity

Cold Crank Amps (CCA) 0°F / -17°C	710
Marine Crank Amps (MCA) 32°F / 0°C	888
Reserve Capacity (RC @ 25A)	484 Minutes
Reserve Capacity (RC @ 75A)	127 Minutes

Hour Rate	Capacity / AMP Hour	Current / AMPS
@ 100 Hour Rate	320 AH	3.2 A
@ 72 Hour Rate	315 AH	4.38 A
@ 50 Hour Rate	298 AH	5.95 A
@ 20 Hour Rate	250 AH	12.5 A
@ 15 Hour Rate	238 AH	15.83 A
@ 10 Hour Rate	220 AH	22 A
@ 8 Hour Rate	215 AH	26.88 A
@ 5 Hour Rate	198 AH	39.5 A
@ 1 Hour Rate	100 AH	100 A

Amper hour capacity ratings based on specific gravity of 1.280.
Reduce capacities 5% for specific gravity of 1.265 and 10% for 1.250.

Specifications




SAI GLOBAL
ISO 9001
Quality

Weight	32 kg	70.5 lbs
Length	24.4 cm	9.61"
Width	19.1 cm	7.52"
Height Inc. Term.	26.9 cm	10.59"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process, battery components & electrolyte levels.

Electrolyte Reserve	44 mm	1.75"
Container	Polypropylene	
Cover	Polypropylene	
Handles	Built-in	

Cycle Life vs. Depth of Discharge

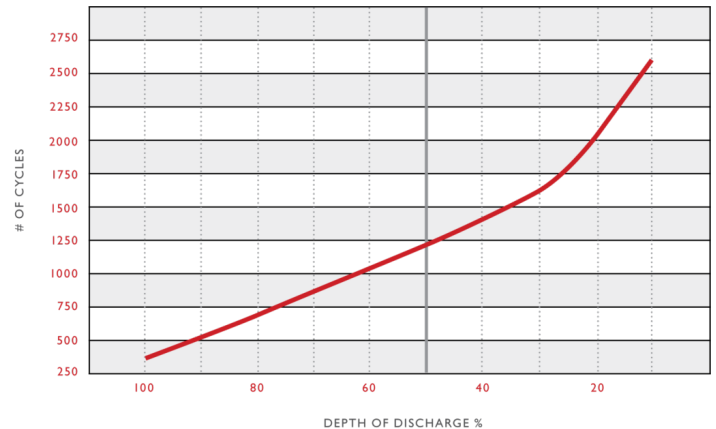

Voltage vs. Depth of Discharge

